

Installation instructions



- ① Unbox the T-frames and the base of the machine.



- ② Loosen the handle to open the power clamp and insert the T-frame into the clamp. Close the handle to fasten the clamp. Install the other T-frame the same way.



- ③ Use this bolt to adjust the tightness of the power clamp.



- ④ Insert the power supply as indicated below.



- ⑤ Use the adjustable screws to change the stroke length.



- ⑥ Install the accessories; install the connector into the jack by pulling back the lock ring. Installation of all accessories is the same.




- ⑦ Use a lubricator to grease the slide rail when needed.



- ⑧ Angle adjustment options; Adjust the angle to the desired position.



Remote control instructions

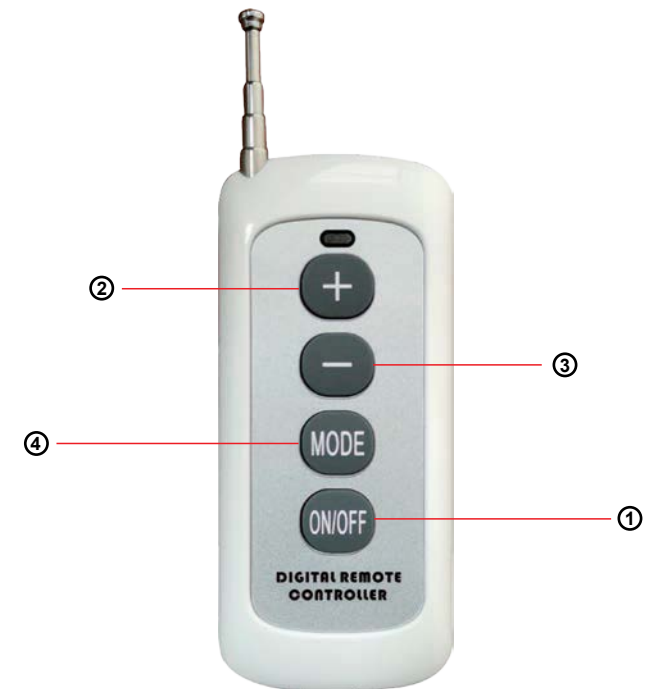

- ① Power – On / Off
- ② Increase speed
- ③ Decrease speed
- ④ Mode – choose between 18 different modes

The range of the remote control reaches to 15 meters.
Note: This product is not waterproof.